



SERIES-100
TYPE TB.130
PITCH: 9.5 mm


PI/TB.130
01.01.10

BARRIER TERMINAL BLOCKS

LOW BARRIER • DOUBLE ROW • OPEN BACK



TYPE 130 TERMINAL BLOCK & MARKER STRIP		
NUMBER OF WAYS	DIMENSIONS	
	A	B
1	19.0	27.0
2	28.5	36.5
3	38.0	46.0
4	47.5	55.5
5	57.0	65.0
6	66.5	74.5
7	76.0	84.0
8	85.5	93.5
9	95.0	103.0
10	104.5	112.5
11	114.0	122.0
12	123.5	131.5
13	133.0	141.0
14	142.5	150.5
15	152.0	160.0
16	161.5	169.5
17	171.0	179.0
18	180.5	188.5
19	190.0	198.0
20	199.5	207.5
21	209.0	217.0
22	218.5	226.5

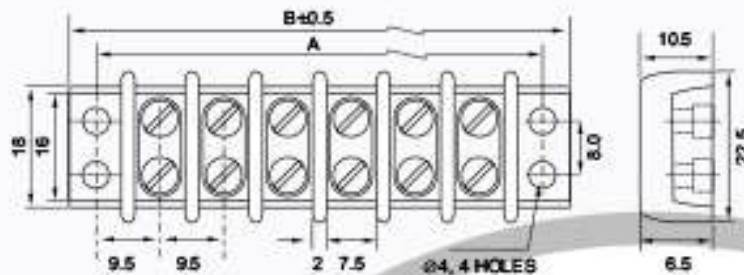

HARDWARE, VARIATIONS AND ACCESSORIES FOR TB.130 USING SAME BASIC BLOCK.

<p>Feed-through for hookup wire</p> <p>130-L</p>	<p>Feed-through for soldering on PCB's (w/o mounting ends)</p> <p>130-LP</p>	<p>130-LS</p>
<p>130-S</p>	<p>130-SS</p>	<p>Hole 130-HL Spade 130-SL</p>
<p>130-SJ</p>	<p>130-HJ</p>	<p>130-SP</p>
<p>130-SC</p>	<p>130-MS</p>	<p>130-FS</p>

S P E C I F I C A T I O N S

ELECTRICAL RATING:
Rated voltage : 1100 V, rms.*
Current rating : 15 AMPS.

*Voltage rating based on 1/3 break-down voltage

HARDWARE

Screw, Eyelets
& Accessories : Brass (Ni-plated)
Solder Terminals : Brass Tinned.

MOULDED MATERIAL :
Electrical Grade Phenolic black/or
Melamine (Khaki)

WIRE SIZE :

Will accommodate lugs for wire size
AWG 22 to 14.

ORDERING CODE /GUIDE

Type	*Terminal Type	No of ways
TB.130	LS	10

→ TB.130-LS-10 ←
*Omit when basic block is required.