






Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches

**Series VBT 950C**


**Barrier Terminals**

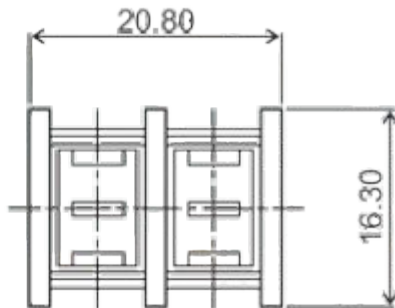

**VBT 950C/2**

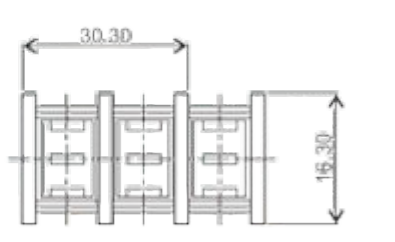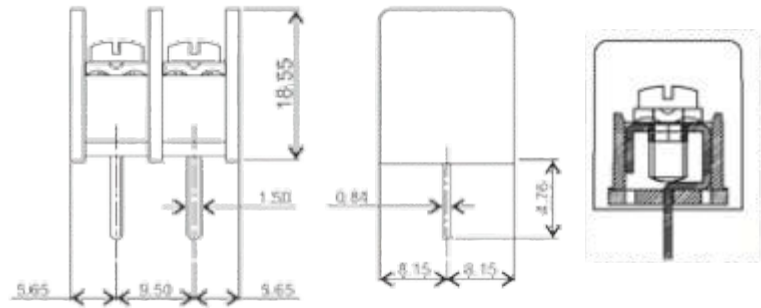

**VBT 950C/3**

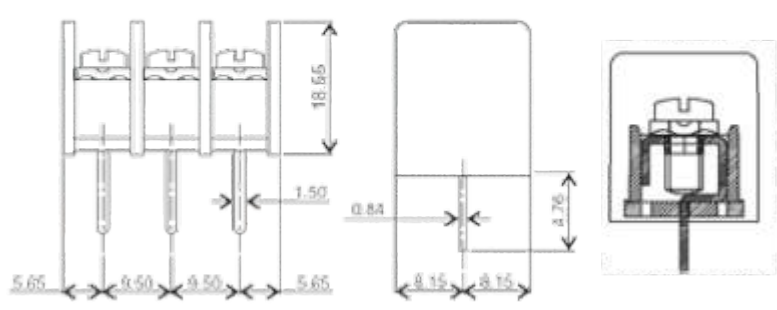

**TECHNICAL SPECIFICATIONS :**

|                       |  |
|-----------------------|--|
| Pitch                 | : 9.50 mm  |
| Nominal Rating        | : 25A/300V   |
| Dielectric Strength   | : > 2kV  |
| Moulded Material      | : Polyamide (Nylon) 66-UL94V0 or V2  |
| Insulation Resistance | : > 1000 MΩ @ 500 Vdc  |
| Terminal              | : Tin Plated Copper Alloy  |
| Wire Cage             | : Nickel Plated Brass  |
| Screw                 | : M4 - BA<br>: Brass Nickel Plated Suffix "P"<br>: MS Trivalent Zinc Plated Suffix "C" |
| Wire Size             | : 2.5 mm <sup>2</sup>  |
| Maximum Torque        | : 0.30 - 0.40 Nm   |

**Approval Data**

UL : 300V / 20A / 22-14 AWG  
cUL : 300V / 20A / 22-14 AWG  
CE : 300V / 25A / 22-14 AWG

**ORDERING CODE**

|        |       |       |
|--------|-------|-------|
| Series | Poles | Grade |
|--------|-------|-------|

→ VBT 950C/2 P ←

Number of Poles: 2 to 12

Grade : P or C

P = Professional Grade

C = Economy Grade

|       |       |       |       |       |       |       |       |       |       |        |        |
|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|
| Poles | 2     | 3     | 4     | 5     | 6     | 7     | 8     | 9     | 10    | 11     | 12     |
| L(mm) | 20.80 | 30.30 | 39.80 | 49.30 | 58.80 | 68.30 | 77.80 | 87.30 | 96.80 | 106.30 | 115.80 |
| S(mm) | 9.50  | 19.00 | 28.50 | 38.00 | 47.50 | 57.00 | 66.50 | 76.00 | 85.50 | 95.00  | 104.50 |

