



ISO 9001:2008
VITAL
Electrocomp






Google Us : Vital Connectors


Manufacturer of PCB Terminal Blocks, Fuse Holders, Barrier Terminals, & Switches

Screw Type (Cage-Clamp Pluggable Design) Connectors

Series COM 90 M

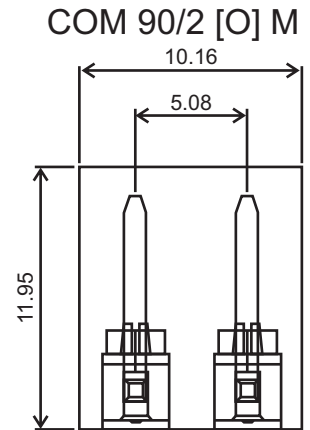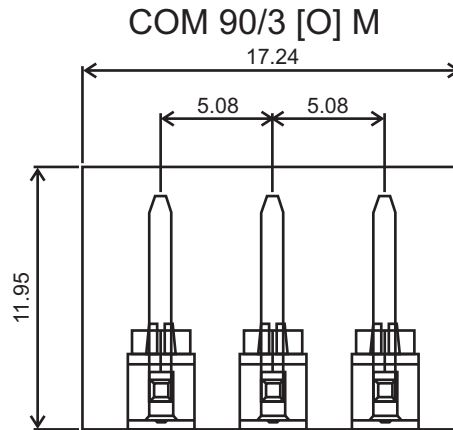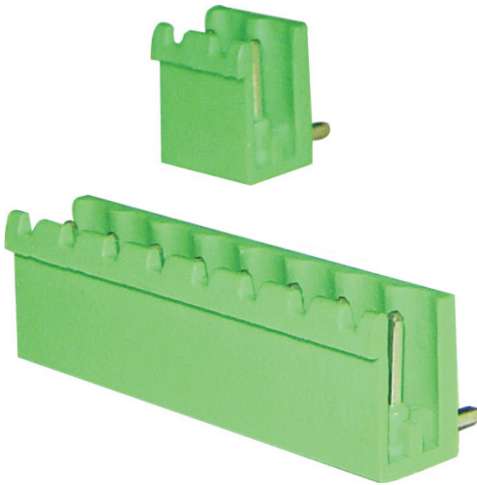

[O] Open Type (With Side Walls)

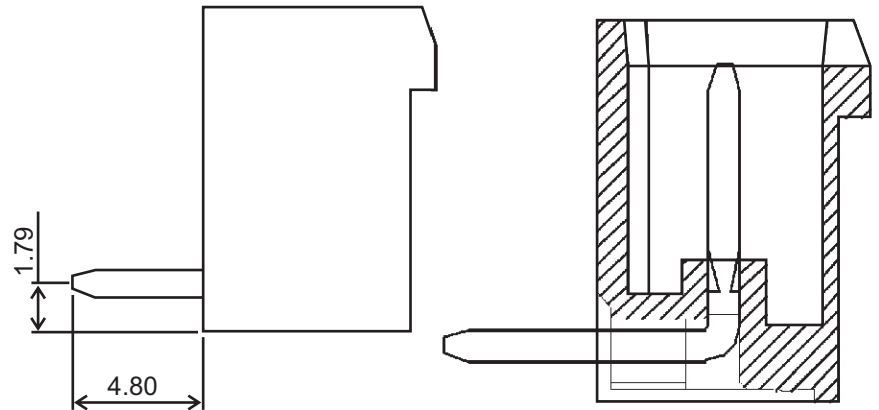

TECHNICAL SPECIFICATIONS :

Pitch	: 5.08 mm
Nominal Rating	: 15A/300V
Dielectric Strength	: > 2kV
Moulded Material	: PA66 - UL94 V0 or V2
Insulation Resistance	: > 1000 M Ω @ 500 Vdc
Terminal	: Tin Plated Copper Alloy

Approval Data

UL : 300V / 12A / 28-12 AWG
cUL : 300V / 12A / 28-12 AWG
CE : 300V / 15A / 28-12 AWG

ORDERING CODE

Series	Poles	Grade
COM 90/n [O] M P		

n = Number of poles : 2 To 8
Grade : P or C

P = Professional Grade
C = Economy Grade

► The recommended PCB hole diameter is 1.30 mm unless otherwise specified for that product.



Customized Color Options Available
*Subject to Minimum Order Quantity

Off/Works: 830/2, GIDC Estate, Makarpura, Vadodara - 390010
Landline: 9227979806, Telephone: 9227979801
Email: sales@vitalelectrocomp.com • Web: www.vitalelectrocomp.com

Google Us : Vital Connectors